








## Treads and Risers

Treads are 1-1/16" thick. Standard depths ("D") are 10-1/2" & 11-1/2" and standard lengths ("L") are 36", 42", 48", 54", 60" & 72". Treads are available up to 186" long and in other depths up to 36", please call for pricing.


Treads and Risers Model Numbering System

**10 48** Ordering Example:  
For 10 1/2" x 48" use 1048  
Depth + Length  
(omit fractions)


### Landing Treads

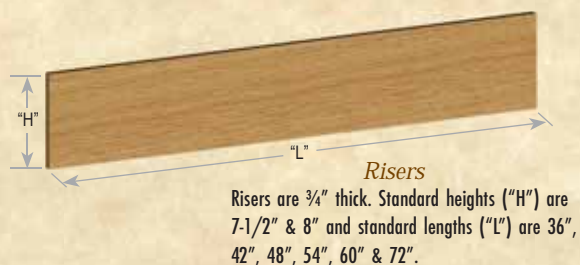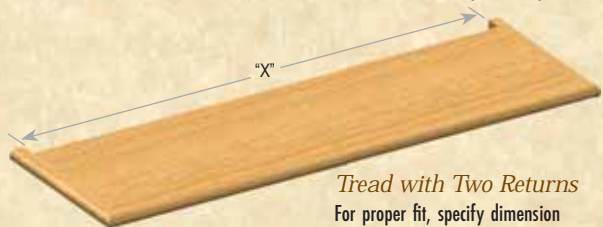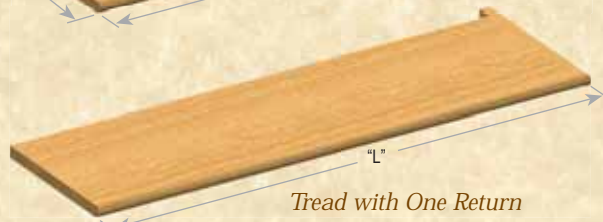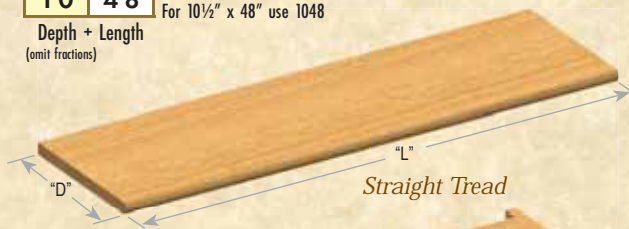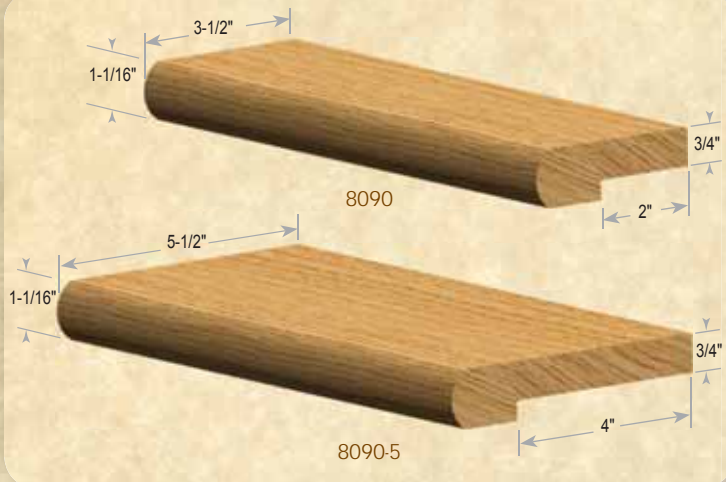

### Nosings

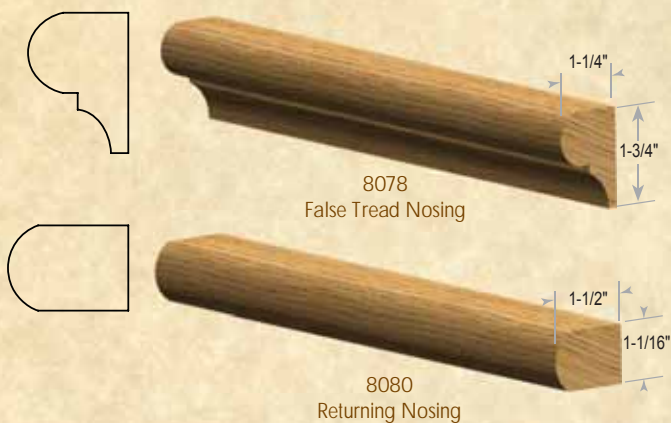

### Mouldings

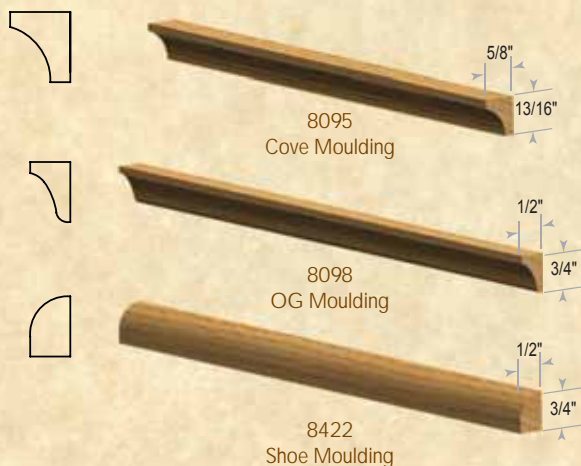

### Winder Treads

Oak Pointe can supply winder tread blanks.

- "L" should be 2" longer than the tread length
- "D" should be the sum of the narrow tread end plus the wide tread end plus 2"
- Blank is good one side and yields 2 winder treads
- Bullnose option available on the two "L" sides

