



TREADS AND RISERS



★★★ *MADE IN THE USA* ★★★

WHERE TRADITION AND INNOVATION CREATE EXCELLENCE

Custom components are an integral part of our business. Call for pricing on your designs for interior and exterior use.



Front Edge Options – Treads, Landing Treads and Starting Steps

3/4" Tread Thickness




1 1/16" Tread Thickness




Treads with Tongue and Risers with Grooves


Treads with Straight Tongue

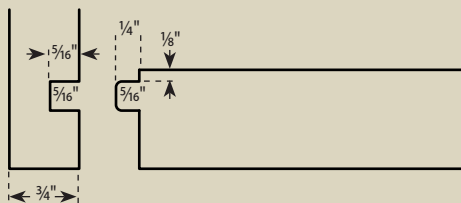

Treads with Radius Tongue

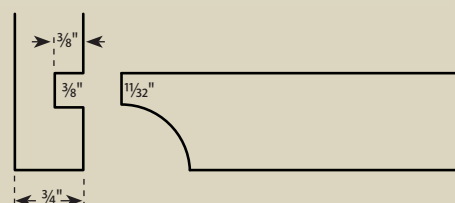

Risers

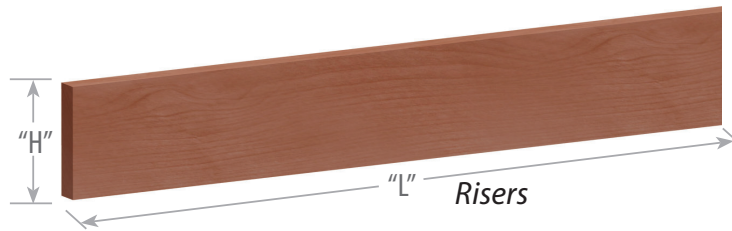

Risers are 3/4" thick. Standard heights ("H") are 7 1/2" & 8" and standard lengths ("L") are 36", 42", 48", 54", 60", 72" & 84".

Treads

Standard Tread thicknesses (T) are 1 1/6" and 3/4" but others are available (see *Thick Treads* on pages 248-249). Standard depths ("D") are 10 1/2" & 11 1/2" and standard lengths ("L") are 36", 42", 48", 54", 60", 72" & 84". Treads are available up to 186" long and in other depths up to 36", please call for pricing.

Returns are 1 1/4" W x 1 1/4" longer than the tread depth with a bullnosed end. Specify if you have other requirements.


Bullnosed front edge and bullnosed returns are standard but square or eased edges are available, see page 250.



◀ **Straight Tread**


► **Ordering Example:**
For 10 1/2" x 48" use 1048

10	48
▲	▲
Depth	+ Length

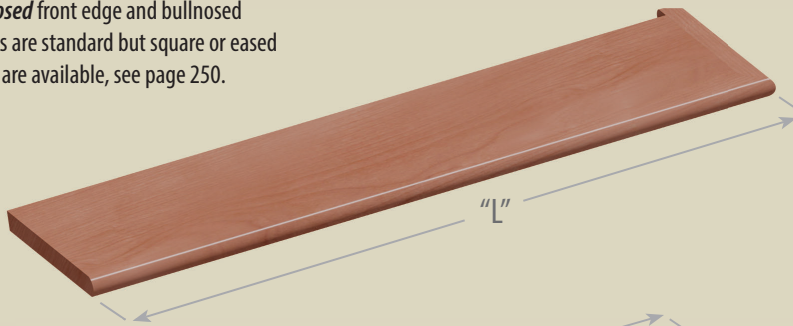

◀ **Tread with One Return**

Specify RH or LH (RH shown). Reversible treads are also available, please inquire.

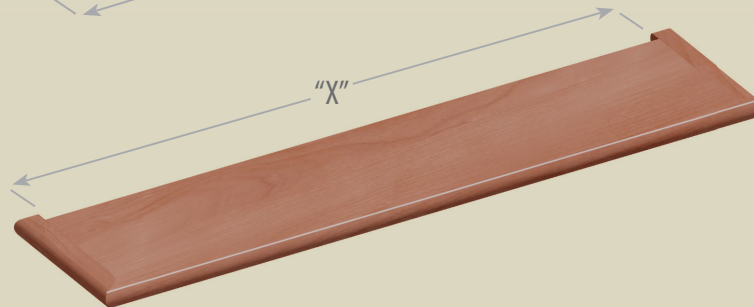


◀ **Tread with Two Returns**

For proper fit, specify dimension required between the returns ("X").

Returns are applied with a coped (radius) miter. Returns with 45° miters available.

Bow Front Treads

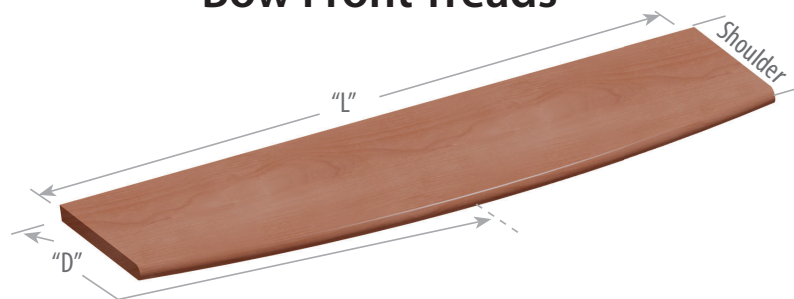



OAK POINTE

WHERE TRADITION AND INNOVATION CREATE EXCELLENCE

96 NEW PACE ROAD
NEWCOMERSTOWN
OHIO 43832

P 740.498.9820
F 740.498.9821

GENERAL INQUIRY

INFO@STAIRPARTSANDMORE.COM

QUOTE REQUESTS

QUOTES@STAIRPARTSANDMORE.COM

SUBMIT ORDERS

ORDERS@STAIRPARTSANDMORE.COM

Connect with us on:

