




We offer Starting Steps in all of our wood species and a selection of styles to meet most any installation requirements. Starting Step treads are 1 1/16" thick and the overall height with the riser is 8". Steps come with shoe & cove moldings. Starting Step length is measured by the length of the "notch" ("X"), with the standard being 48". Both lengths shorter and longer than 48" are available, please specify your "X" dimension when ordering. Single bullnose steps are handed- when ordering please specify LH or RH. (Reversibles available)

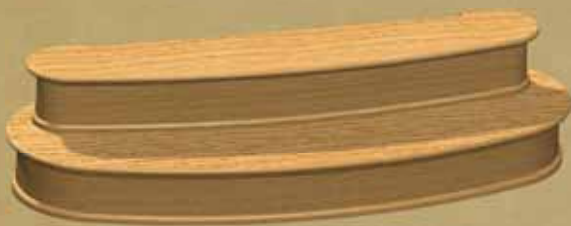


Utilize the elegant look of a double stacked starting step when designing your stairway. Please contact us for a quotation.

Starting Steps

Starting Steps when using Volutes and Turnouts:


8010 and 8210 Single Bullnose or 8015, 8215 and 8415 Double Bullnose Steps may be used with all of our volutes and turnouts.

Straight Front Steps

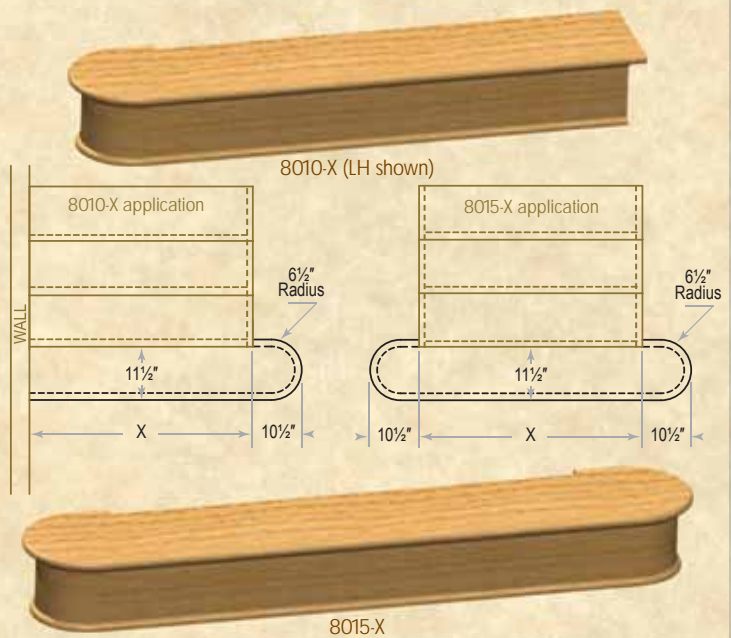


Bow Front Steps

- Enhance your stairway!

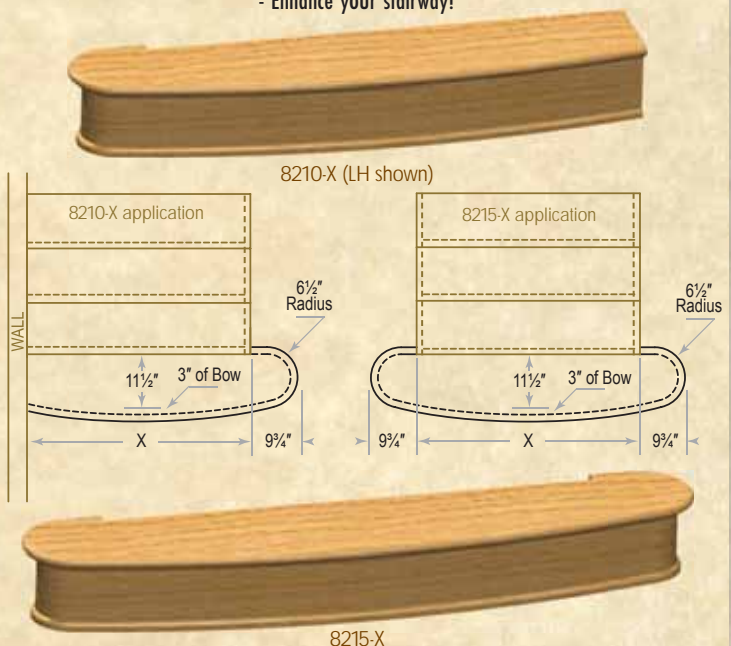


Winder Step (Reversible)

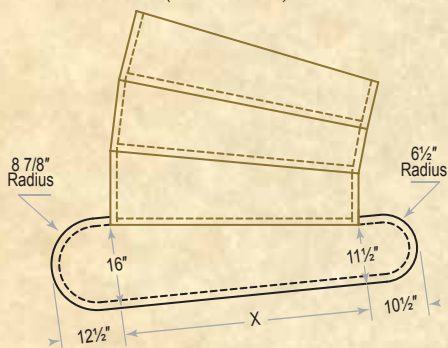

For Wider Handrails

Consider our 7¼" radius 8310 single bullnose and 8315 double bullnose steps. All of our volutes and turnouts may be used with these steps.


Straight Front Steps

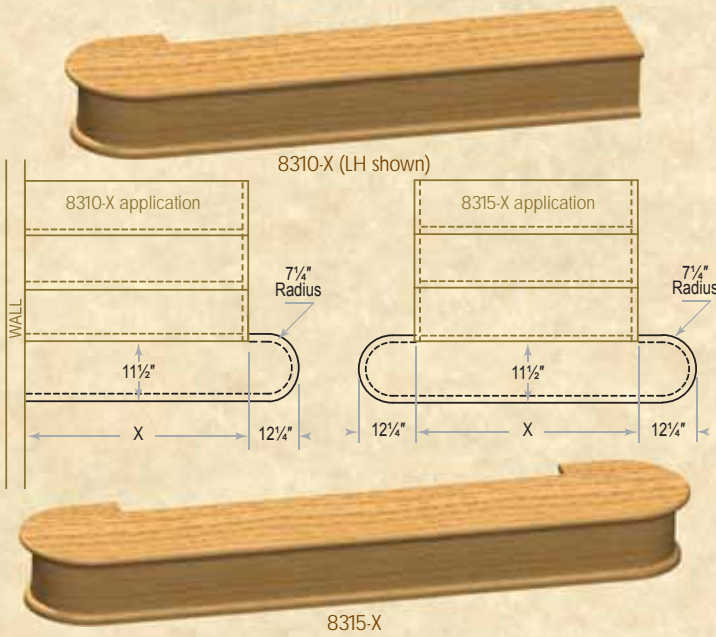

Starting Steps when using Post to Post Newels, Box Newels and 90° Starting Fittings:

- Use 8040 or 8060 steps with Box Newels or when placing a Post-to-Post newel at the second riser
- Use 8440 or 8640 Single Bullnose or 8460 or 8660 Double Bullnose Steps when using starting fittings with a 90° up easing.
- Use 8440 or 8460 Steps when using volutes and turnouts with the following handrails: 6010, 6210, 6310, 6601 or with turnouts for 6109 and 6701.
- Use 8640 or 8660 Steps when using volutes and turnouts for 6005P, 6400, 6519, 6710, 6910, 9500, 9700P or volutes for 6109 and 6701.

| Single Bullnose | Tread Depth "D" | Double Bullnose |
|-----------------|-----------------|-----------------|
| 8040-X | 11 ½" | 8060-X |
| 8440-X | 14" | 8460-X |
| 8640-X | 16" | 8660-X |

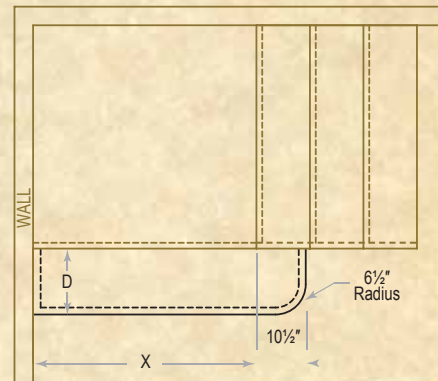

Steps when using Box Newels

- Use 8030 or 8050 steps with any of our Box Newels

